

10-02-00

A

## LAW OFFICES OF ADAM H. JACOBS

PATENT ATTORNEY

PHONE - (402) 345-9035

1904 FARNAM STREET, SUITE 726

FAX - (402) 341-5344

OMAHA, NEBRASKA 68102

September 29, 2000

Commissioner of Patents and Trademarks  
 Box Patent Application  
 Washington, DC 20231

Dear Sir:

Transmitted herewith for filing is the patent application of:

Inventor(s): Alberto Alvarez-Calderon F.  
 For: MULTIMISSIION TRANSONIC HULL AND HYDROFIELD

Enclosed are:

One (1) sheet of original drawings;

Specification;

Declaration;

Certificate of Mailing by Express Mail;

A verified statement to establish small entity status  
 under 37 C.F.R. § 1.9 and 37 C.F.R. § 1.27 and

The filing fee has been calculated as shown below:

<u>FOR:</u>	<u>Nº FILED</u>	<u>Nº EXTRA</u>	<u>RATE</u>	<u>FEE</u>	<b>Basic Fee - \$345.00</b>
Total Claims	39	-20	19 x 9	171.00	
Indep. Claims	5	-3	2 x 39	78.00	

TOTAL: **\$594.00**

A check in the amount of five hundred ninety-four dollars (\$594.00) to cover the filing fee is enclosed.

Respectfully submitted,

*Adam H. Jacobs*  
 Adam H. Jacobs  
 For the Firm

AHJ  
 Enclosures

JC841 U.S. PTO  
 09/677583  
 09/29/00

Applicant or Patentee: Alberto Alvarez-Calderon F.

Serial or Patent N°

Docket N° 1186-003

Filed or Issued:

Title: **MULTIMISSION TRANSONIC HULL AND HYDROFIELD**

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
(37 C.F.R. §§ 1.9(f) & 1.27(b)) - INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 C.F.R. § 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office regarding the invention entitled: **MULTIMISSION TRANSONIC HULL AND HYDROFIELD** described in:

☒ the patent application and specification filed herewith.

☐ application serial number \_\_\_\_\_, filed \_\_\_\_\_

☐ patent number \_\_\_\_\_, issued \_\_\_\_\_

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 C.F.R. § 1.9(c) if that person had made the invention or to any concern which would not qualify as a small business concern under 37 C.F.R. § 1.9(d) or a nonprofit organization under 37 C.F.R. § 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below: None

\*Note: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 C.F.R. § 1.27)

NAME

ADDRESS

☐ INDIVIDUAL

☐ SMALL BUSINESS CONCERN

☐ NONPROFIT ORGANIZATION

NAME

ADDRESS

☐ INDIVIDUAL

☐ SMALL BUSINESS CONCERN

☐ NONPROFIT ORGANIZATION

NAME

ADDRESS

☐ INDIVIDUAL

☐ SMALL BUSINESS CONCERN

☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 C.F.R. 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

**Alberto Alvarez-Calderon F.**

Signature of Inventor

Signature of Inventor

Signature of Inventor

Date

Date

Date

(A) TITLE OF INVENTION: MULTIMISSION TRANSONIC HULL AND HYDROFIELD

(B) CROSS REFERENCE TO RELATED APPLICATIONS

Sections 1 to 14 of Provisional Application 60/015.704 of 03/13/96 pertains to Patent Application 08-814.418 filed 03/11/97. These documents specify the shape of the submerged portion of the transonic hull (TH), for example, Figs. 13 and 14 of that Application. The corresponding high speed hydrodynamic regimes in displacement mode identified as TH are shown in Figs. 14c, d, h, and i. The above Applications also indicate that TH pertains to submersibles (line 3 of section (e) of Specifications).

Sections 15 to 18 of Provisional Application 60/015.704 of 03/13/96 pertains to Patent Application 08-814.417. Hence, Patent Application 08-814.417 is a technical continuation of Application 08-814.418, including sequence of numbers of section and of figures in the original application. The Patent Office, however, required that the section and figure numbers of Application 08-814.417 should be amended to begin with Figure Number 1, and also requested a rearrangement of headings of sections. Accordingly, Application 08-814.417 was amended as requested with deletions of many figures to simplify the case. In the amended application original Fig. 37 was retained and renumbered as Fig. 3 without being changed and referred to in the amended text as in the original, "for special military applications."

Notwithstanding compliance with the above, the Patent Office further requested that the amended specifications be refiled as CIP with a Petition for CIP under CFR 1.53e. This was done on December 28, 1999 via FAX and first class mail with an additional fee of \$130 paid with check 105 of Union Bank of California.

No response has been received on applicant's petition for CIP. However, since

applicant's inventions, and past and on-going proprietary R & D work need to be protected, there is hereby filed a direct CIP of application 08/814417, independent of the Petition for CIP.

The present application pertains to special subsurface and surface capability of a unique embodiment of the Transonic Hull TH and Transonic Hydrofield TH, which was first disclosed at the Patent Office as original Fig. 37 in the provisional application 60/015.7004 of March 13/96 as well as Fig. 37 in original Application 08-814417. That figure was renumbered as Fig. 3 in the Petition for CIP filed December 28, 1,999. To avoid confusion, it is also numbered Fig. 3 in the present CIP. The experimental success of subsurface operation of TH/TH was mentioned to Examiner E. Swinehart in applicant's interview of August 1999.

The present CIP includes original Fig. 37, now Figure 3, and covers the design of TH/TH for a subsurface hydrodynamic regime which also functions in different with at-surface hydrodynamic regime. Because of this double requirement, it is a bi-hydro multimission TH vehicle. TH-MM referred to as TH-MM, where MM denotes multimission capability. TH-MM has also special air drop and amphibian beaching capabilities.

(C) STATEMENT OF FEDERAL SPONSORS: NOT APPLICABLE.

(D) MICROFICHE: NOT APPLICABLE.

(E) BACKGROUND OF INVENTION.

#### 1. Field of Invention

The multimission capability of TH-MM is related generally to surface ship and boats,

and to subsurface vehicles and submarines. More particularly it relates to a new type of vehicle which can operate successfully as a displacement and/or transplanar surface regimes, as well as a winged vehicle capable of subsurface operation though sustained downward hydrodynamic forces on its wings at design submerged operational speeds. The multimission also covers air drop into water directly into submerged operation, and amphibious water/beach operations.

## 2. Description of Related Art

Given the broad scope of the invention, a description of related art covers the following:

### Subsurface vessels

(a) Submarine is a vessel such as shown in Fig. 1A, supported on surface by buoyant forces with small buoyancy reserve on surface such as shaded area 3 in Fig. 1B.

Descent and climb is controlled by adding or removing water ballast. Additional control is provided by external foils such as rear rudder in yaw, and forward horizontal foils 7 in pitch. The submarine is autonomous, capable of operating at the surface of the water in displacement mode but, in order to facilitate diving its reserve buoyancy is minimal compared to surface ships and boats. Submarines can descend to large depths. Consequently, it must use circular structural cross-section such as in Fig. 1B to resist great compressive forces at depth. Submerged, but near surface it can ingest air by a retractable vertical tube called Schnorkel, unless nuclear powered (not requiring air for engine).

The ratio of submarine weight to total displacement of its shape approaches 1 at surface and is substantially 1 when submerged.

The weight-to-drag ratio of a deeply submerged submarine can be high compared to

surface ships at the same speed and weight, because when deeply submerged, it does not generate surface waves. Nuclear submarines have no practical restrictions on range and endurance. Their weight-to-drag ration when operating at (or near) the surface, however, is not favorable due to great surface disturbance they create, as can be seen in Fig. 2 taken from published photographs of submarines at speed at the surface.

(b) Semi-submarine have been proposed as transport ships with a permanent submerged displacement volume and a surface-piercing strut for permanent fresh air breathing, allowing the use of internal combustion engines and increasing crew comfort. It is claimed to have favorable lift-to-drag ratio and favorable sea-keeping characteristics in certain sea conditions, compared to surface ships, for example as described in a paper by MIT's Professor Mandel's examining several novel ship types.

(c) Submersible is generally understood to be a subsurface vessel having a limited structural and operational subsurface capability. It is capable of surface actions such as firing guns and torpedoes. As designed in the past they had limited subsurface speed and range, for example, the earliest submersibles of the first World War.

(d) Swaths are multihulls with submerged displacement volume.

#### Surface Vessels

The present invention is also related in its surface operation to Transonic Hull and Transonic Hydrofield of Patent Application 08-814418 and 08-814417.

It may also relate to art cited by Patent Office, and by applicant, in pursuit of

Application 08-814418. However, the present application, in its multission bihydro substance, is not related to the above art.

(F) BRIEF DESCRIPTION OF INVENTION (TO BE MADE).

(G) BRIEF DESCRIPTION OF DRAWINGS.

↑

Figs. 1 and 2 are old art of submarines.

Figs. 3, 4<sup>A</sup> and <sup>4B</sup>~~5~~ correspond to Figs. 37, 30A and 30B as originally filed in application 08/814417 and correspond to Figs. 3, 4A and 4B in the Petitions for CIP on

Application 08/814417, requested December 28, 1999.

*Figs 5A to 5F pertain to an advanced TH-MM tested by the writer*

*Fig 6A and 6B pertain to an amphibian TH-MM  
Fig 7 shows TH-MM for Air Prop. Fig 8A & 8B  
show TH-MM for surf operation. Fig 9 shows  
TH-MM for mult, wing above surface, surface, subsurface  
and transitional operation.*

(H) DETAILED DESCRIPTION OF INVENTION.

1. Introduction. For reasons that may become evident in the following review, the scope of the present TH-MM invention can be better understood by firstly considering aircraft, and then ships and boats.

(a) There are two basic types of aircraft:

- Heavier-than-air winged craft which derive lift to equilibrate total weight by change of momentum of air flow, which completely surrounds the wings and tail.
- Lighter-than-air craft, for example the dirigible, which uses buoyant forces of lighter-than-air gases to equilibrate total weight, with control provided by small foils.

Again, the craft is totally surrounded by air. Dirigible can climb by releasing ballast and descends by releasing gas or by other means, such as compressing and decompressing gas.

The lift/drag ratio of the dirigible is high at low to medium speeds, because it has no lift-induced drag, but payload and speed are limited. The aircraft is faster with a lower L/D and higher payload fraction. It is also less dependent on adverse weather.

(b) There also are two basic types of water supported vessels:

- Subsurface vessels, for example, the submarine such as in Fig. 1.

When submerged, it is analogous to the dirigible: buoyant forces equilibrate total weight and there is no lift-induced drag. Dive and ascent is controlled by intake and expulsion of water weight into and out of ballast tanks. Like the dirigible, maneuver are accomplished with small foils, at the fore and aft ends of the submarine, such as 5 and 7 in Fig. 1A, or trim with midbody foil such as 9 in Fig. 2. Also, like the dirigible, the submarine when submerged has high lift/drag ratios.

- Surface vessel, for example, displacement ships, in which buoyant lift from a small portion of the total volume of the ship equilibrates total weight. Another example is the planing boat, in which dynamic lift forces equilibrate most of the total weight. But surface vessels, unlike aircraft, are not completely surrounded by water fluid, but operate at the interface between air and water, i.e. at water-surface interface. Nevertheless, surface vessels have volumetric or lift-induced drag, and their L/D are lower than a submarine, although their speed regime in semi-displacement or planing modes can be higher than a submarine, due to large decrease of wetted area and viscous drag.



When the submarine operates very near surface, or at the surface, it really is in an off-design condition, and it becomes an inefficient hybrid, because its shape is optimized, structurally and hydrodynamically, to operate submerged at some depth. The surface waves it generates create wave-making drag. Those generated by a modern submarine operating at surface level are very large, as can be seen in Fig. 2, taken from published photos.

Indeed, there are several design features inherent in the submarine which penalize its operation at the surface. For example:

- Use of circular structural sections to withstand large hydrostatic compression forces when submerged, a shape also used in semi-submarines, swath bodies, and submersibles. This shape penalizes speed at the surface and has a very large radar cross-section. Also its large wake is immediately observable.

- Use of minimal reserve buoyancy when floating or moving at the surface, to minimize the volume and time needed to introduce water ballast to dive. This results in cramped space in the submarine, and, moreover, it requires a tower or "sail" 8 in Fig. 2 for people's access at surface level, which is highly visible and also narrow.

In consequence of the above, the potential speed,  $L/D$ , and fuel efficiency of a submarine at surface level is limited, its detectability by radar or visual means is large, and its utility as a surface vessel is extremely limited. On the other hand, its depth of submerge is very large, it is a dangerous attack vessel, and its submerged  $L/D$  is favorable.

The submarine has been, historically, a military vessel with a cruel and sacrificed role in two world wars. During the subsequent Cold War, submarines were developed for strategic long range role with nuclear power, and nuclear weapons.

Special circular shapes and materials were developed, and drag and silent propulsion improved with refinements in hydrodynamics.

Following the Cold War, the role and need of nuclear powered and nuclear armed submarines is not as critical. Moreover, new requirements and missions have arisen related to activities in littoral and fluvial waters, also known as coastal and riverine waters. Example of these missions are interdiction of drug traffic, of weapon smuggling, and of insertion and removal of anti-terrorist forces, which can be carried out by military organizations. Many of these missions could be performed by surface craft due to high speed and maneuverability, but at considerable risk, since they are easily detected by radar and other means and can be attacked by missiles. The submarine could also perform some of these missions, except that in its current form, it is too large and expensive and cannot operate in coastal waters of low depth. Moreover, its surface capabilities are limited in speed, maneuverability and high detectability.

A new type of water vehicle is needed which is capable of operating efficiently on surface with high speed and with low radar cross section, and which is also capable of submerging promptly to evade a missile, and of sustained submerged operations in coastal water and rivers. Additional mission flexibility is also needed, such as air drop directly to submerged operation, and emerge from below water to beaches and return.

Summarizing, this new type of vehicle is a TH multimission vehicle, the TH-MM, having two basic hydrodynamic regimes: subsurface and surface operations. This is the subject of the present invention.

2. Objective of TH-MM. The present invention specifies a new type of water- sustained

vehicle with at-surface and subsurface capabilities, with design features meeting two or more of the following features:

- Operation as a surface vessel with low weight, with special buoyancy reserves, with high speed capability, and with high efficiency.

- Accordingly, at surface TH-MM can have many features of TH/TH including operation at subcritical and supercritical regimes, and other new regimes defined, as hypercritical, transplanar and x-regimes, to be defined by means of another CIP.

- Operating as fully submerged vessel not using water ballast, but hydrodynamic wings instead, to provide downward forces when submerged which counter the lifting buoyant forces generated by the submerged special buoyancy reserve.

- A TH-MM capable of transitioning from surface to submerged condition rapidly to avoid missiles without need to take water ballast, and to maneuver submerged, and emerge to the surface, with hydrodynamic wings and flap type elevator on the vehicle's stern, and with a control system similar to the elevator on the tail of a winged aircraft in flight, except that hydrodynamic wing "lift" is downward.

- Accomplish transition between surface and submerged operation with minimal wake. ✓

- Achieve motion on surface with minimum wake and minimum generation of white water and turbulence.

- Shape the surfaces of the vessel above water to have low detectability by radar, and by visual, thermal and acoustic devices.

- Shape the undersurface of the vessel below water to have low detectability from sonar, and other devices, and minimize hydro noise.

- Design the wings which permit subsurface operation of the TH-MM to also enable on surface motion riding on the wings, generating upward lift, to reduce wetted surface above water level.

-Shape the vehicle to permit air drop from transport aircraft into a water body bow first, with smooth immersion and transition to sustained submerged motion, including a parachute-arrested descent, and entry with propulsive device already activated.

-Power the vehicle with rotary water impellers placed to counteract vortex formation at the vehicle's stern, at least when operating at surface.

-Shape the TH-MM to have wedge shaped ends, the forward one with its sharp edge vertical, and the rear one horizontal.

-Structure the vehicle so its relatively flat ends are adapted to be permeable to water to prevent collapse of its surfaces at depth, and/or to settle the TH-MM on bottom of shallow waters, restricting the dry portion of the submerged vehicle to a central body region capable of supporting compressive forces from external water pressure with internal curved structures.

-Shape and control the vehicle to permit successful operation in surf zones by diving below breakers and steep waves.

-Design the TH-MM and its propulsion to permit slow submerged motion towards an adequate beach,

-Provide vehicle design and features that are compatible with transportation, launch, and retrieval from larger vessels including conventional submarines, patrol boats, and aircraft, with the wings of the TH-MM being movable to stowed positions to minimize overall stowed dimension.

-Provide an amphibian capability for the vehicle by equipping it with at least three wheels or treads, which are preferably retracted except when beaching.

Two or more of the objectives above are met in the various embodiments of the invention specified below.

### 3. TH-MM for special military applications.

This is a vehicle capable of surface operation and of subsurface operation. Fig. 3 shows the surface at operation of TH-MM, having a submerged volume portion below water level 10-10 in Fig. 3. Its waterplane shape is shown in Fig. 4A. Alternatives to the profile are shown in Fig. 4B.

In Fig. 3 there is shown a generally triangular waterplane having sides 31 and 33, apex 32 and base 34. Moreover, above the water level 10-10, there is shown a unique shape also of special interest for military applications: a unique triangular shape in side view with apex at 35, and a profile's long triangular base between waterplane's apex 32 and base 34, hence the base is at waterplane level. As shown in Fig. 3, there are also triangular side surfaces above waterplane, such as right side 36, is inwardly inclined above the waterplane. An important military benefit is that only three faceted flat surface project above water, and, therefore, its radar detectability is minimal. The control is provided in pitch and heave bywings, such as right wing 3 adjacent midbody. The left wing 3 is not visible in the drawing. Roll can be made by differential wing angles. Other controls for the vehicle of Fig. 3 are shown in Figs. 4A and 4B, and will be reviewed in greater detail in relation to Fig. 5.

### 4. Propulsion for TH-MM

Fig. 4A also shows a TH-MM vehicle having a bottom surface 40, left side 41 and right side 42. Adjacent level of 40, inside TH-MM and on its right side there is mounted water jet turbine with an intake channel or duct 44 into which water flows for water jet engine 43, for example, water arrow 44 through intakes orifices 46 and 47 in Fig. 4B.

The exit duct or channel 58 for the water jet engine changes from circular section at the water jet, to a rectangular or trapezoidal section at exit flap 48, with the corresponding exit streamline 49 having higher pressure than at intake 45, by reason of the work done on the internal flow by the impeller 50 in water jet 43. The pressure difference across the impeller normally provide, at its shaft, the propulsive thrust  $T_I$  generated by the water jet engine, where  $I$  denotes the impeller source of thrust.

However, water jet propulsion for TH-MM as shown in Figs. 4A and 4B provide additional unique propulsive benefits formulated by this writer, explained below.

• The intake flow 45 lowers the local pressure, and its propagates forward such that a drop of pressure appears on the lower sides of TH-MM, for example by pressure vectors 53, 52, and 51, which decrease in magnitude as the intake is approximated. As a consequence the pressure drag component on the sides of TH-MM also decreases from 54 to 55 to 56 in Fig. 4A, to a lower value than would be the case without a lateral intake 46 and 47 in Fig. 4B. In consequence, the pressure drag of the sides of TH-MM decreases, resulting in an equivalent incremental thrust  $\Delta T_P$ , where  $p$  denotes the pressure origin of the thrust gain.

• Another incremental thrust occurs by the controllable hollow flap 48, which guides the high pressure water jet exhaust in a water sheet of width approximately equal to maximum local beam, as shown in Fig. 4A which by the extensive exposure to undersurface flow adjacent the stern, generates by entrainment a thrust augmentation  $\Delta T_E$ , where  $E$  denotes the entrainment origin of the gain.

• The adjustability of the angle of flap 48,  $\infty F$ , shown as 57 in Fig. 4B, permits optimization of discharge direction of flow 49, compared to a fixed exit angle, for an extra gain of thrust  $\Delta T_{\infty F}$ , where  $\infty F$  denotes the flap angle origin of the gain.

• The high energy wake from the flap expands across the stern leading to a separate thrust augmentation by smoothing out a subcritical wake of TH-MM which results in a thrust increment  $\Delta T_w$ , where w denotes the wake improvement origin of the gain.

Thus, the total thrust TT on the right side of Fig. 30a is :

$$TT = T_I + \Delta T_p + \Delta T_E \neq \Delta T_{\infty} F + \Delta T_w.$$

The thrust penalty of the above system, namely, a part of the internal friction in duct 58 and/or 44, -  $\Delta T_D$ , is smaller than the sum of the gains.

Figs. 4A and 4B also show another unique feature of TH-BH, namely, its ability to increase cargo and decrease reserve buoyancy to favor submerged operation, adding draft at bow with constant optimum draft at stern, with or without stern flap. At reduced cargo, the waterplane is at 61 at the bow in Fig. 4B, with center of gravity CG and center of buoyancy CB at 62. At heavier cargo, waterplane is at 63, with CG and CB at 64. Unlike conventional hulls, the centroid of waterplane of area 65 in TH-MM is significantly behind CB. Hence, a stable pitch situation exists in pitch dynamics, increasing in pitch damping as the weight is increased and CB moved forward. Flap 48 is adjusted to remain as shown approximately parallel to the waterplane.

An alternative propeller propulsion is shown at left of Fig. 4A, with the propeller adjacent the rear corner in planview of the TH waterplane. Two special forms of hydrodynamic cooperation are thus provided.

•The left propeller 66 has counter rotation (CR) relative to the vortex rotation tendency associated with the left submerged corner of TH-MM, leading to a thrust gain  $\Delta TCR$ , where CR denotes the counter rotation origin of the gain.

•The local propeller slipstream improves the Gothic wake GW 67 at subcritical speeds of TH-MM decreasing wake drag as symbolized in 67 with no propeller and 68 with propeller, leading to a thrust increase  $\Delta TW$ , where W denotes the wake improvement with originated the gain.

Another important feature of the propulsion systems reviewed above are the reduction of visibility of wake, which is obtained by appropriate discharge of high energy propulsive flow in combination with the broad stern of the triangular planform of TH-MM, and the reduced adverse effects of the boundary layer on the undersurface, specially for propeller 66 which has very short undersurface length upstream of that propeller.

##### 5. Hydrodynamic regimes for TH-MM.

The TH-MM has two fundamentally different hydrodynamic regimes.

(a) At surface, it operates in the subcritical and supercritical regimes defined in application 08/814418 and its CIP's, inclusive the hypercritical, transplanar and x-regimes defined in another CIP.

(b) Subsurface, with its wings and tail-like stern, it is fully surrounded by water and is shaped to have fully attached flows, with wings and control surfaces designed *with*



*. Also,*  
~~however~~ with different criteria for stability, control, and handling qualities. The center of gravity, and hydrodynamic center for wings are different in functions, as will be shown in Fig. 5, with due allowance for the differences which high water density, compared to air, imply.

(c) Transient surface-subsurface-surface: This is a very important regime, in which rapidity of immersion, and low wake during immersion, are of critical importance, for example to avoid an oncoming missile. The polygonal crosssections of TH-MM such as in Fig. 3, and others to be reviewed later on are of considerable hydrodynamic value towards these goals, as is specified also in Fig. 5.

## 6. Design and tests of TH-MM for advanced missions

Fig. 3 has shown in isometric view the archetype of TH-MM which establishes the upper body shape for submerged operations, as well as at-surface operation and transition mode. Fig. 4A has shown its waterplane, a trailing flap, and disposition of powerplants. Fig. 4B has shown principal power plant intakes, and alternative profile features, including a flap, which can be independent of the propulsion system.

To accommodate more volume for greater payload than in Fig. 3, and to more extensively describe the cooperation between wings of Fig. 3 and flaps of Fig. 4A and 4B in aeronautical terms for maneuvering TH-MM submerged on same principles as an winged aircraft in the air, but with modifications as wing lift does not oppose gravity forces, there is shown in Fig. 5 a more detailed advanced embodiment of TH-MM having greater submerged volume with a narrower submerged beam, while retaining a faceted body above water when operating in its at-surface regime.

Specifically Figs. 5A to 5E show a multission multihydro TH-MM embodiment which has been successfully tested to operate in three basic hydrodynamic regimes: At-surface, subsurface, and transient between surface and subsurface.

Fig. 5A shows in side view an MM hull 70 floating static in water level 72 with a submerged profile 74 and an above surface triangular profile 76, which has low radar signature. The center of gravity is shown at 76 which corresponds to the at-surface center of buoyancy. A flap type elevator 78 is shown at the trailing edge of the airfoil-like rear profile of the MM hull, having a wedge like upper and lower rearward hull surfaces 80 and 82, tapering in side view to the flap. The exit angle between water plane 72 and undersurface 82 is  $B^*$ , and included angle between 82 and 80 is  $B^{**}$ . Windows for visibility at surface and submerged are 84 forwardly and 86 rearwardly. Approximate longitudinal dimensional scale is shown on top of the page, in units which can be feet, meters, or multiples thereof.

In the submerged condition water level is shown at 88. When submerged, the center of buoyancy shifts to 90 by a distance 92. The wings are shown with an aerodynamic axis 94, at a distance 96 from the CG. A pair of rudder are shown as 100L and 100R.

Fig. 5B shows the triangular planform of MM hull having right side 77 and left sides 75 meeting at approximately vertical leading edge 79 defining an entry angle  $\alpha^*$ . At mid body there is shown right wing panel 94R, left wing panel 94L and hydrodynamic wing axis 94 equivalent to a wing aerodynamic axis. At the stern there is an approximately rectilinear trailing edge of the MM hull on which is mounted trailing flap 78, which acts as an elevator control on the body and wings. Also there is shown location of rudder 100L and 100R.

To further clarify MM's shape, 5C shows the crossection of MM hull at its trailing edge 81, having a thin horizontal contour. Fig. 5E shows the crossection adjacent the leading edge 79 with a thin vertical contour. Finally Fig. 5D shows the crossection at a mid body station where most of the volume for payload is located.

The TH-MM has general shape envelopes by which angle  $B^*$  can be less than or up to  $\alpha^*$ , and  $B^{**}$  can be from approximately  $\alpha^*$  to three times  $\alpha^*$ .

The range of hydrodynamic forces which the wings can generate depends on the area  $S_w$ , lift coefficient  $C_L$  (a function of angle of attack  $\alpha$  and dynamic pressure  $q$ , which in turn is a function of dive speed  $V_D$  and submerged speed  $V_S$ ).

The buoyancy reserve above static waterplane 72 is capable of generating, if submerged, an additional lift  $L_{BR}$ . It must be countered and cancelled by the wing's down force on area  $S_w$ , defined as follows for vertical equilibriums:

$$L_{BR} = C_L q S_w$$

whence  $S_w = L_{BR} / q C_L$

The  $C_L$  range is a designer's choice in the range of 0.3 to about 1.5 with an unflapped wing or up to about 2.5 if wing flaps are used on the wings, such as 95R and 95L. The reason for the wide range of  $C_L$  are:

- The need to meet various speeds for various conditions, such as dive, surface, cruise submerged, and even raise the MM hull above water.


- There is an additional equation for pitch equilibrium that has to be satisfied simultaneously with vertical equilibrium.

It is seen in Figs. 5A to 5E that the three dimensional shape of TH-MM comprises:


(a) A wedge shaped forward end portion with sharp edge forward and in a vertical orientation, and an included angle of  $\alpha^*$  in planform.

(b) A wedge shaped rearward end portion with a sharp edge rearward and in a horizontal orientation with included angles in profile of  $B^*$  at surface and  $B^{**}$  submerged.

(c) A mid body portion having principal volume, with a local beam substantially less than the beam at the stern.

(d) A relation between the angles  $\alpha^*$ ,  $B^*$  and  $B^{**}$ .  This type of elongated slim body allows for easy dive for submergence, low wake when submerged very near surface, inherent pitch stability when submerged, no need for horizontal tail in presence of wings, downward rudders that are effective, good visibility forward and aft, and stealth at surface and submerged.

This same hull shape when operating at the surface can do so at TH's subcritical and supercritical hydrofields, and the faster hypercritical, transplanar and x-regimes to be defined in a separate CIP.

In Fgi. 5A and 5B, pitch is controlled by elevator 78, heave for sink or climb by angle 93  symmetrically on on right and left wings relative to the flow, roll by asymmetric use of angle 93, and coordinated turns at surface <sup>or</sup> ~~at~~ submerged with coordinated rudder and ailerons <sup>or asymmetric wing angles.</sup> For example a right turn requires the trailing edge of rudders to move to the right seen from above, the trailing edge of right wing upwards, <sup>the</sup> and trailing edge of left wing downwards.

## 7. TH-MM for submerged passive surveillance.

Fig. 5F shows an arrangement of 5A in which once submerged rapidly by action of the wings, the rear and forward portions 103 and 105 of TH-MM can be flooded by opening valves 102 and 104 to slowly settle the MM hull on a shallow floor in a stationary passive surveillance status. It should be noted that pre-compressed air in air tank 106 and 108 can be used to evacuate the flooded water compartments, by valves 102<sup>1</sup> and 104<sup>1</sup> but failing that due to damage, the wings under forward speed could easily raise the TH-MM vehicle to the surface, in which case a manual pump could easily evacuate the flooded compartments during forward motion at the water's surface.

The TH-MM of Fig. 5F uses a mixed propulsion system with batteries 107 and 109 powering its submerged motion, and an air breathing motor using fuel from fuel tanks 112 and 113 for surface operation, which also charges the batteries, and stores compressed air. Alternative power systems using fuel cells, lithium or hydrogen systems, or other energy sources can be used.

Fig. 5F also shows that in a small size craft, three persons can fit in its dry section, two facing back and one forward within a cabin's trapezoidal floorplan within the triangular planform shape of the hull's planform.

In Figure 5F, the hull is divided in three basic sections: Rear portion 103 which can be flooded, mid portion 101 which is dry, and forward portion 105 which can be flooded. For surface operations, the end regions are dry and water level is at 114. When 103 and 105 are flooded, the boat settles on the floor of a shallow water body, for example

to carry out passive surveillance.

Another advantage of end portions 103 and 105 is that they can be flooded to avoid compression forces when diving to depths that otherwise would require circular crosssections. Finally, portions 103 and 105 can be filled, while at surface, with external air, or oxygen, for prolonged subsurface operation.

An alternative to flooding tanks 103 and 105, is to equip the craft with self attaching "anchors" which can be fired downwards, with a cable trailing to the craft, to penetrate the floor of the water body, then the craft could roll in the cable to hold the craft immobile adjacent the floor.

Returning to earlier text of the specification, the statement made that aerodynamic theory and design criteria can be applied to subsurface TH-MM. This has to be qualified with three important and fundamental changes:

(a) The relations between gravity forces and on wings forces is entirely different:

- In an aircraft the wing lift opposes vehicle weight.
- In a TH-MM submerged wing lift adds to vehicle weight.

(b) Virtual mass in accelerated motion is not significant in aircraft and is important for submerged or surface vessel. Its effect on time response of the vehicle permits design criteria not viable for aircraft.

(c) The water air interface in aircraft provides favorable "ground effect," in surfacing it provides adverse "wave making" effect.

In consequence of the reversal of role of the wing forces (Item a), the longitudinal stability and trim parameters of TH-MM are not operable in the same sense as in aircraft. Hence, good test result were obtained with wing's downward lift vector ahead of the vehicles mass CG by a first relatively large distance, and also ahead of the submerged CB by a second but much smaller distance. In aircraft use of the first distance on an aircraft configured as TH-MM of Fig. 5 would be inadvisable with a "tailless" fuselage shaped as the body of TH-MM, as it would be divergent in pitch and untrimable as well.

In respect to the second distance, there is a very peculiar situation in which safety is ultimately improved by having the hydrodynamic axis of the wing ahead of the submerged CB.

Another important benefit of having the submerged CB ahead of the vehicles CG is that in case of propulsion failure when submerged, the positive buoyant forces on the submerged TH-MM will cause a pitch up as upward motion is gained with path control by stern is flap. In the contrary case, an uncontrolled tail first rising would occur, which would not permit successful use of tail's elevator for path control.

## 8. Amphibian TH-MM and folding wings

Fig. 6A shows the side view of an amphibian version of TH-MM. Hull 121 is equipped with a retractable tricycle wheel suspension. Deployed forward wheel 123 can be retracted to position 125, wheel 123 can be steerable. At the rear are right wheel 127 which can be retracted to position 129. Bottom view of the tricycle arrangement is

shown in Fig. 6B with left wheel 129, as well as wheels 127 and 123. Each of the rear wheel is powered, with electric motors mounted, for example, on adjacent trailing arms which hold the wheels, such as arm 131. Differential power of right and left rear wheel can also steer the vehicle on land, with a castering front wheel, which could also be powered.

Fig. 6A and 6B also show right and left wings 133 and 135, respectively, folded upwards for two purposes: Reduce overall span or width of vehicle during ground operation, and reduce water resistance when in at-surface operation in the transonic and higher speed regimes. Hydrodynamic controls include elevator 135, an folding rudders 137, which are shown unfolded in fig. 6a and folded in Fig. 6B.

The upward folding of wings 133 and 135 apply also to Figs. 5 and 3, but were not shown thereon for purpose of clarity of drawing.

## 9. TH-MM for air-drop to water bodies

Fig. 7 shows an airdrop of TH-MM into water body 141. Specifically TH-MM 143 is descending after drop from an aircraft (not shown) at a rate of descent in air VRD established by deployed parachute 145. Shortly before water contact, or upon contact, parachute 145 is released by release device 147, and water propeller 149 is powered at high level, with wings 151 and elevators 153 set for submerged slight pitch-up trim at water speed VRD. Under effect of propeller 149 entering the water, the subsurface path 155 of TH-MM will be developed with smooth entry and gradual deceleration, as has been verified directly by free vertical drop from selected heights of models of TH-MM, and also by encounters of TH-MM in high speed surface mode near vertical large



waves which are penetrated successfully.

Failure to apply marine propeller power, (or alternative water jet power), upon contact with water 141, will result in an adverse vehicle path 157 bow first, leading to full stoppage, and reversal path towards surface tail first along water path 159 including leap 161 in the air, tail first. Accelerations of these paths are high and undesirable. Also an on-surface floating presence at end of 161 is detectable visually, and perhaps by radar.

Hence the needed power and trim levels before or at contact is the on-design requirement for a successful air drop. Successful model drops have been performed with successful subsurface path 155 at model air drop speeds corresponding speed/length ratio upon contact of approximately 10 and 14 with tolerable decelerations and radius of pull out 156. For a TH-MM having 100 feet length, the air descent speed with a speed/length ratio of 10 would result in a vertical contact speed of 100 knots. If the final submerged speed were 50 knots, the deceleration would be 50 knots, or 84 feet/sec. Assigning 3 seconds of decelerating time at uniform deceleration rate, the average deceleration would be less than 1G, tolerable for trained crews. The peaks maybe higher than the assumed average. However, the maximum subsurface speed can be governed by power, and the contact speed reduced by larger or more numerous parachutes. The centrifugal acceleration during submerged pullout should be no larger than 3-6 G's.

The released parachute has distributed weights 163 and 165 that should sink parachute promptly so no trace of entry is left on water surface 141 a few seconds after contact.

## 10. TH-MM for landing, evacuating, and rescue in large surf

Fig. 8 shows another special capability of TH-MM: It can successfully perform covert landings, or rescue missions, in enormous seas and surf relative to size of TH-MM. Specifically, Fig. 8 shows TH-MM moving at surface to the right. Model tests have demonstrated it will easily penetrate a large broken, or unbroken steep wave, of a height several times the hulls length, and emerge smoothly on the other side of the wave. In Fig. 8 there is shown penetration against steep wave 172 across subsurface path 174, smoothly emerging to surface along path 176, on the other side of the wave. A similar maneuver can be made against the next wave. Penetration is accomplished with a mild "dive" command neutralized and followed by a mild climb command for trajectory 174, which in fact the model reputedly performed with great ease under head ocean waves such as shown in Fig. 8, and larger, even though visibility for the remote control pilot was not available along path 114, trim being set by estimated time intervals only.

Another important benefit of TH-MM its ability to travel at surface for full visibility for to pilot, as shown in Fig. 8B, maintaining its distance ahead of pursuing worse-case broken wave 178. Moreover, the flat stern shape of stern of Th-MM permits stoppage of Fig. 8B with broken wave 178 passing over 170 without serious disturbance, as the broken wave having reduced mass due to air content encounters only a very slippery body of significant mass.

Other tests performed with TH-MM are diagonal surfing of a steep wave such as face of wave 172 in Fig. 8A, precisely as a surfer would, in which case very high speeds are

Year	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100																																																		
Population	1000000	1050000	1100000	1150000	1200000	1250000	1300000	1350000	1400000	1450000	1500000	1550000	1600000	1650000	1700000	1750000	1800000	1850000	1900000	1950000	2000000	2050000	2100000	2150000	2200000	2250000	2300000	2350000	2400000	2450000	2500000	2550000	2600000	2650000	2700000	2750000	2800000	2850000	2900000	2950000	3000000	3050000	3100000	3150000	3200000	3250000	3300000	3350000	3400000	3450000	3500000	3550000	3600000	3650000	3700000	3750000	3800000	3850000	3900000	3950000	4000000	4050000	4100000	4150000	4200000	4250000	4300000	4350000	4400000	4450000	4500000	4550000	4600000	4650000	4700000	4750000	4800000	4850000	4900000	4950000	5000000	5050000	5100000	5150000	5200000	5250000	5300000	5350000	5400000	5450000	5500000	5550000	5600000	5650000	5700000	5750000	5800000	5850000	5900000	5950000	6000000	6050000	6100000	6150000	6200000	6250000	6300000	6350000	6400000	6450000	6500000	6550000	6600000	6650000	6700000	6750000	6800000	6850000	6900000	6950000	7000000	7050000	7100000	7150000	7200000	7250000	7300000	7350000	7400000	7450000	7500000	7550000	7600000	7650000	7700000	7750000	7800000	7850000	7900000	7950000	8000000	8050000	8100000	8150000	8200000	8250000	8300000	8350000	8400000	8450000	8500000	8550000	8600000	8650000	8700000	8750000	8800000	8850000	8900000	8950000	9000000	9050000	9100000	9150000	9200000	9250000	9300000	9350000	9400000	9450000	9500000	9550000	9600000	9650000	9700000	9750000	9800000	9850000	9900000	9950000	10000000

11. Video tapes of experimental work on TH-MM.

All the statements pertaining the model behavior at surface, submerged, and in waves and surf have been video recorded and are available to demonstrate to the patent office the unique features of TH-MM.

1 I Claim:

2 1. A surface and subsurface operational watercraft having an elongated body  
3 with a forward end and a rearward end, said watercraft being further characterized in  
4 having:

5  
6 a) A weight and a power means;

7  
8 b) Said body having a planview with a narrow portion adjacent said forward end and  
9 a broader portion adjacent said stern;

10  
11 c) Said body having right and left lateral wings;

12  
13 d) Said vessel being capable of operating in, at and below the surface of water;

14  
15 e) Said vessel when floating static in water having a first submerged volume  
16 generating an upward buoyant force equal to the weight of said vessel and a  
17 second volume above said first volume sufficient to permit surface operation of said  
18 vehicle with a significant positive reserve buoyancy margin;

19  
20 f) Said vessel being capable of moving forward in water under the action of said  
21 power means in an efficient and sustained manner;

22  
23 g) Said wings being at least partially submerged when said vessel is operating at the  
24 surface of water at a dive speed;

25  
26 h) Said wings at said dive speed operative to generate a downward hydrodynamic  
27 force sufficient to overcome the upward buoyant force of said reserve buoyance  
28 margin when submerged;

1  
2 i) Said wings at a submerged speed operative to generate a downward hydrodynamic  
3 force sufficient to counter the lifting forces generated by said second volume when  
4 submerged;

5  
6 j) Whereby said vessel can operate submerged in an efficient and sustained manner.  
7

8 2. The watercraft of claim 1 wherein said wings are adapted to move with their  
9 trailing edge upwards to submerge said watercraft at said dive speed and retain the  
10 submerged condition at a submerged speed.

11  
12 3. The watercraft of claim 1 in which said wings have movable trailing edge flaps  
13 which are adapted to move upwards to generate a downward hydrodynamic force and  
14 downwards to generate a lifting force.  
15

16 4. The watercraft of claim 1 in which:

17  
18 a) Said broader portion adjacent said stern has a broad beam in planview forming the  
19 trailing edge of said elongated body;

20  
21 b) In that the profile shape of said broader portion tapers in side view smoothly in a  
22 rearward direction with upper and lower surface portions meeting at said trailing  
23 edge.  
24

25 5. The watercraft of claim 4 in which said elongated body has a generally  
26 triangular planform.  
27

28 6. The watercraft of claim 4 further comprising a movable flap mounted on said

1 trailing edge, adapted to be moved downwards to dive and/or pitch down said watercraft,  
2 and upwards to climb towards the water surface and/or pitch up said watercraft.  
3

4 7. The watercraft of claim 4 in which the span of said flap is approximately equal  
5 to the beam at the trailing edge of said elongated body.  
6

7 8. The watercraft of claim 7 with the chord of said flap being no less than  
8 approximately 2.5% of the length of said elongated body.  
9

10 9. The watercraft of claim 1 in which said wings are located adjacent the  
11 midbody portion of said vehicle between said forward and rearward ends.  
12

13 10. The watercraft of claim 1 in which the angle of incidence of said wings  
14 relative to said elongated body is adjustable symmetrically up and down to cause upward  
15 and downward forces on said watercraft.  
16

17 11. The watercraft of claim 10 in which said right and left wings are adjustable  
18 to have angular motion asymmetrically, to cause asymmetric forces that tend to roll said  
19 vessel.  
20

21 12. The watercraft of claim 1 in which, when operating said vehicle at speed on  
22 the surface of water, at least a portion of said wings are adapted to be permanently  
23 immersed in water to generate upward forces and to raise the elevation of said watercraft  
24 and reduce said first submerged volume, whereby drag is reduced.  
25

26 13. The watercraft of claim 5 in which said trailing edge flaps on said elongated  
27 body and said wings are adapted to be moved in coordinated fashion to accomplish pitch  
28 and path control, with the trailing edge of said flap of said elongated body moving in

1 opposite direction to the trailing edges of said wings.

2  
3 14. The watercraft of claim 6 in which the trailing edge of said flap and said wings  
4 are adapted to be moved in the same direction to accomplish changes in heave.

5  
6 15. The watercraft of claim 1 in which said second volume is at least  
7 approximately 50% of said first volume.

8  
9 16. The watercraft of claim 1 in which the area of said wings is no less than the  
10 area obtained by dividing a quantity equal to approximately the buoyant force on said  
11 second volume when submerged by the product of the dynamic water pressure in said  
12 submerged motion times a non-dimensional number no less than approximately 0.4 and  
13 no greater than approximately.

14  
15 17. The watercraft of claim 1 in which the planform of said elongated body is  
16 generally triangular with a narrow end forward.

17  
18 18. The watercraft of claim 17 in which the profile of the submerged portion of  
19 said elongated body in side view when floating in static condition is generally a long triangle  
20 with base adjacent said forward end and apex adjacent said rearward end.

21  
22 19. The watercraft of claim 15 in which the profile view of a portion of said  
23 elongated body above water level is approximately triangular with long base at waterplane  
24 and opposite sides upwards.

25  
26  
27  
28

1           20.    A surface and subsurface operational watercraft having an elongated body  
2 with a forward end which is approximately wedge-shaped in planview with narrow end  
3 forward, and rearward end which is approximately wedge-shaped in profile view with  
4 narrow end rearward,  
5

6           21.    The watercraft of claim 20 in which lateral right and left wings are mounted  
7 on said elongated body approximately adjacent the midbody portion of said elongated  
8 body.  
9

10          22.    The watercraft of Claim 20 in which a movable control surface is mounted on  
11 the trailing edge of said rearward end.  
12

13          23.    The watercraft of Claim 20 in which the included angle in profile of said  
14 rearward end is approximately twice the included angle in planview of said forward end.  
15

16          24.    The watercraft of Claim 20 in which said watercraft, when on the water  
17 surface, the included angle in profile between the water surface and the lower surface of  
18 said rearward end is approximately equal to the included angle in planview of said forward  
19 end.  
20  
21  
22  
23  
24  
25  
26  
27  
28



1           25.    A surface and subsurface operational watercraft comprising:

2  
3   a watercraft hull including;

4  
5   a generally triangular water-engaging section including a pointed bow, horizontally  
6       extended stern and generally straight side walls extending divergently from said bow  
7       to said stern; and

8  
9   a generally pyramidal surface section atop said water engaging section having left and  
10       right forward wall sections each respectively extending from and engaging the upper  
11       edges of one of said side walls and a rear wall section extending upwards from said  
12       stern; and

13  
14   at least two attitude-adjustable water-engaging wings each mounted on and extending  
15       outwards from a respective one of said side walls of said water-engaging section,  
16       said wings operative to control submersion of said watercraft during movement of  
17       said watercraft via attitude adjustment thereof.

18  
19           26.    The watercraft of claim 25 wherein said bow has a substantially deeper draft  
20   than said stern.

1        27.    A watercraft capable of operation above and below water surface having a  
2 bow and a stern, characterized in having:

- 3
- 4    a)    An elongated body having an approximately triangular planform shape with its apex  
5        towards the bow;
- 6
- 7    b)    An elongated shape in profile with a deeper draft towards the bow and a shallow  
8        draft towards the stern;
- 9
- 10   c)    A static waterplane level; and
- 11
- 12   d)    A vehicle weight.
- 13

14        28.    The watercraft of claim 27 wherein

- 15
- 16    a)    The weight of the volume displaced by the watercraft when fully submerged is  
17        substantially larger than the weight of the watercraft.
- 18
- 19    b)    Right and left wings are provided extending laterally outboard of the sides of said  
20        elongated body when said watercraft has forward motion at said water surface, said  
21        wings being capable of providing a downward force at least approximately equal to  
22        the difference between said water weight and the weight of said vessel.
- 23
- 24    c)    With said wings continuing to provide said downward force for continuous  
25        submerged operation.
- 26

27        29.    The watercraft of claim 28 wherein the water weight of the volume displaced  
28 by the vessel is substantially larger than the weight of the vessel.

1           30.    The watercraft of claim 29 further characterized in that a traverse trailing  
2 edge flap is provided adjacent the base of said triangular planform, with said flap being  
3 deflected trailing edge down when operating at the surface to cause said vessel to  
4 submerge, and deflected trailing edge up when operating submerged to cause said vessel  
5 to surface.

6  
7           31.    The watercraft of claim 30 further characterized in having a powerplant and  
8 in that for a given position of wings and flap when operating submerged, depth control  
9 below water is controlled in steady submerged navigation by changes in power level of said  
10 powerplant.

11  
12           32.    The watercraft of claim 22 further characterized in having:  
13  
14 an overall streamlined external surface envelope of said elongated body with a total body  
15 volume;  
16  
17 a primary interior dry volume having a structural midbody portion capable of supporting  
18 external water pressures when submerged; and  
19  
20 a secondary internal volume adjacent said ends which is adapted to be flooded during  
21 submerged operation to equalize pressures between water outside and inside said  
22 external envelope in said secondary volume.

23  
24           33.    The watercraft of claim 20 further characterized in that said vessel is adapted  
25 to be air-dropped from an aircraft, with a parachute establishing a decent rate for head-on  
26 entry into a water body.

27  
28           34.    The watercraft of claim 20 further characterized in that said vessel is adapted

1 for land operation having a tricycle wheel arrangement.

2

3 35. The watercraft of claim 20 further characterized in that said vessel is adapted  
4 to move relative to a large wave by a transient submerged motion and path below said  
5 wave.

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

1           36. A watercraft capable of operating at surface and subsurface conditions  
2 characterized in having:

3  
4 an elongated central body with a longitudinal length;

5  
6 wings mounted on said body having a hydrodynamic wing force center when in motion;

7  
8 a first center of buoyance when floating in surface conditions;

9  
10 a second center of buoyance when in submerged condition.

11  
12           37. The watercraft of claim 36 wherein said center of buoyancy and said  
13 hydrodynamic wing force center are ahead of said first center of buoyance, and that a  
14 downward hydrodynamic force on said hydrodynamic wings is additive to the gravitational  
15 weight force of said vehicle and jointly oppose and tend to equilibrate the total buoyant  
16 forces of the water acting on said second buoyancy center.

17  
18           38. The watercraft of claim 20 further characterized in that said elongated body  
19 has an upper body portion above water level when operating at surface, said upper body  
20 portion having an approximately triangular planform, and an approximately triangular profile  
21 in side view to reduce radar reflection.

22  
23           39. The watercraft of claim 38 wherein said triangular profile in side view is  
24 modified to be polygonal above the water plane, with the outer surfaces of said upper body  
25 portion being faceted between planview and profile.

26  
27  
28

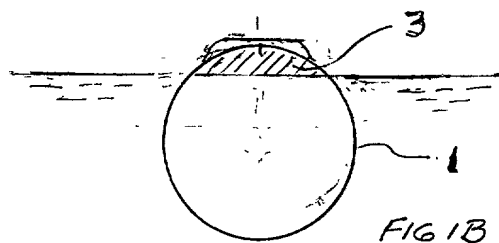
[illegible]

FIG 1B

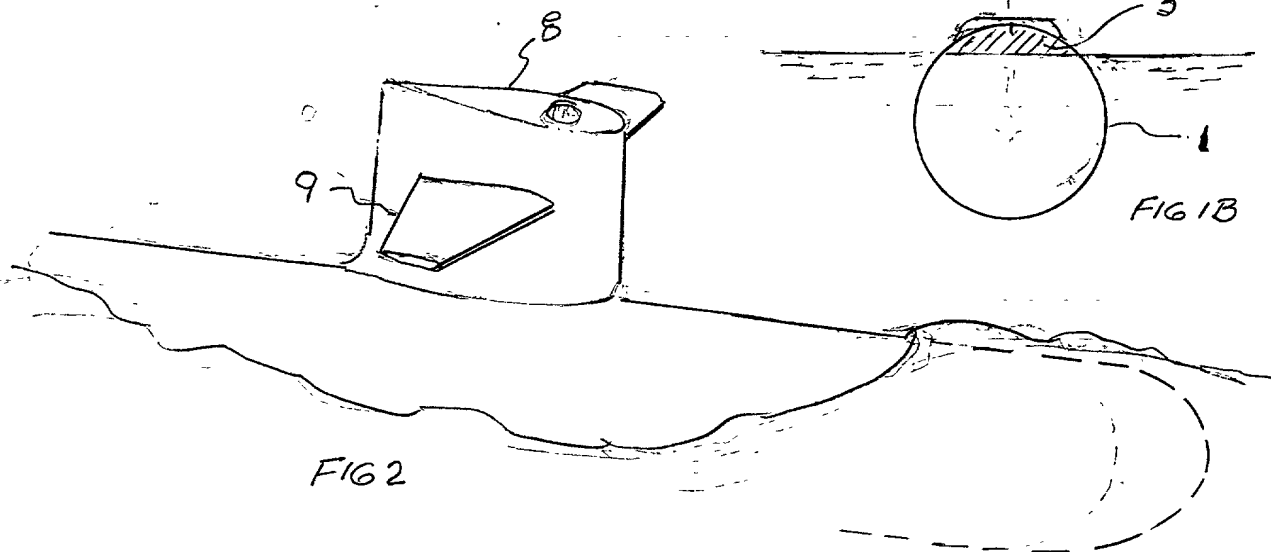


FIG 2


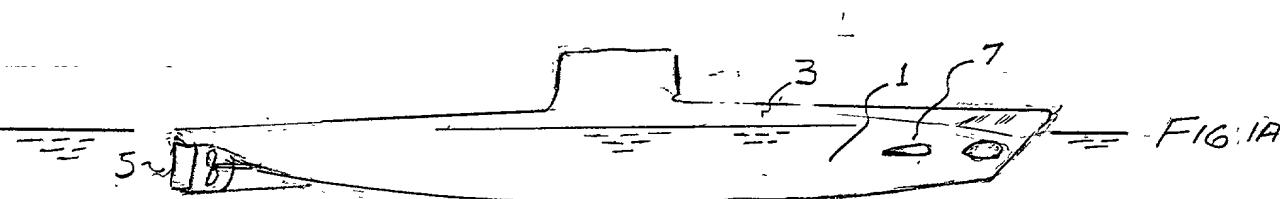


FIG. 1A

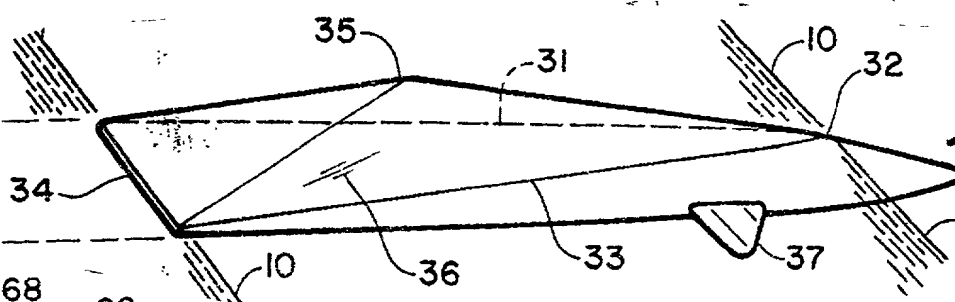

Same as  
Fig 37.9  
Application

F163

08/814 467

03/11/97

and Provisional  
03/11/96

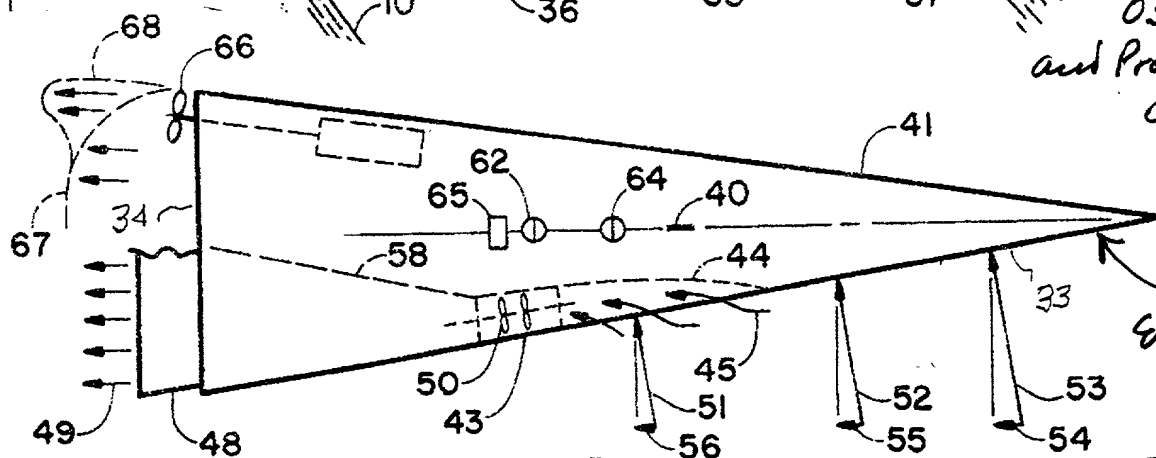


FIG 4A

EX ~~30A~~ 30A  
814417  
del.

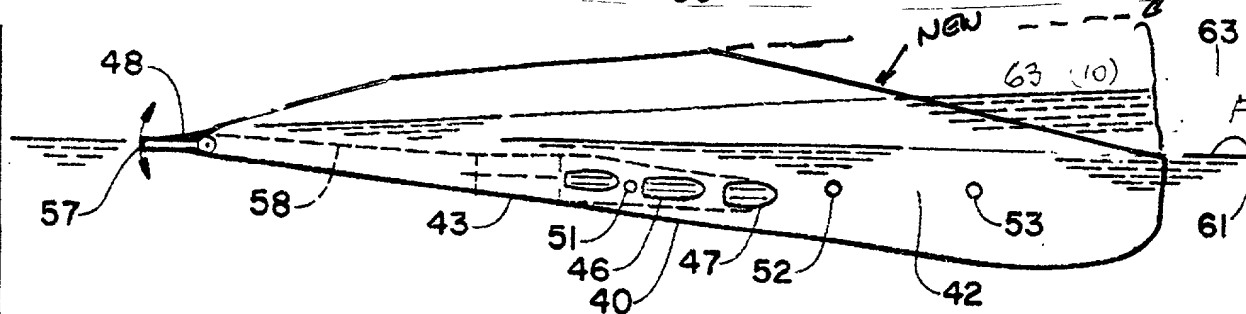
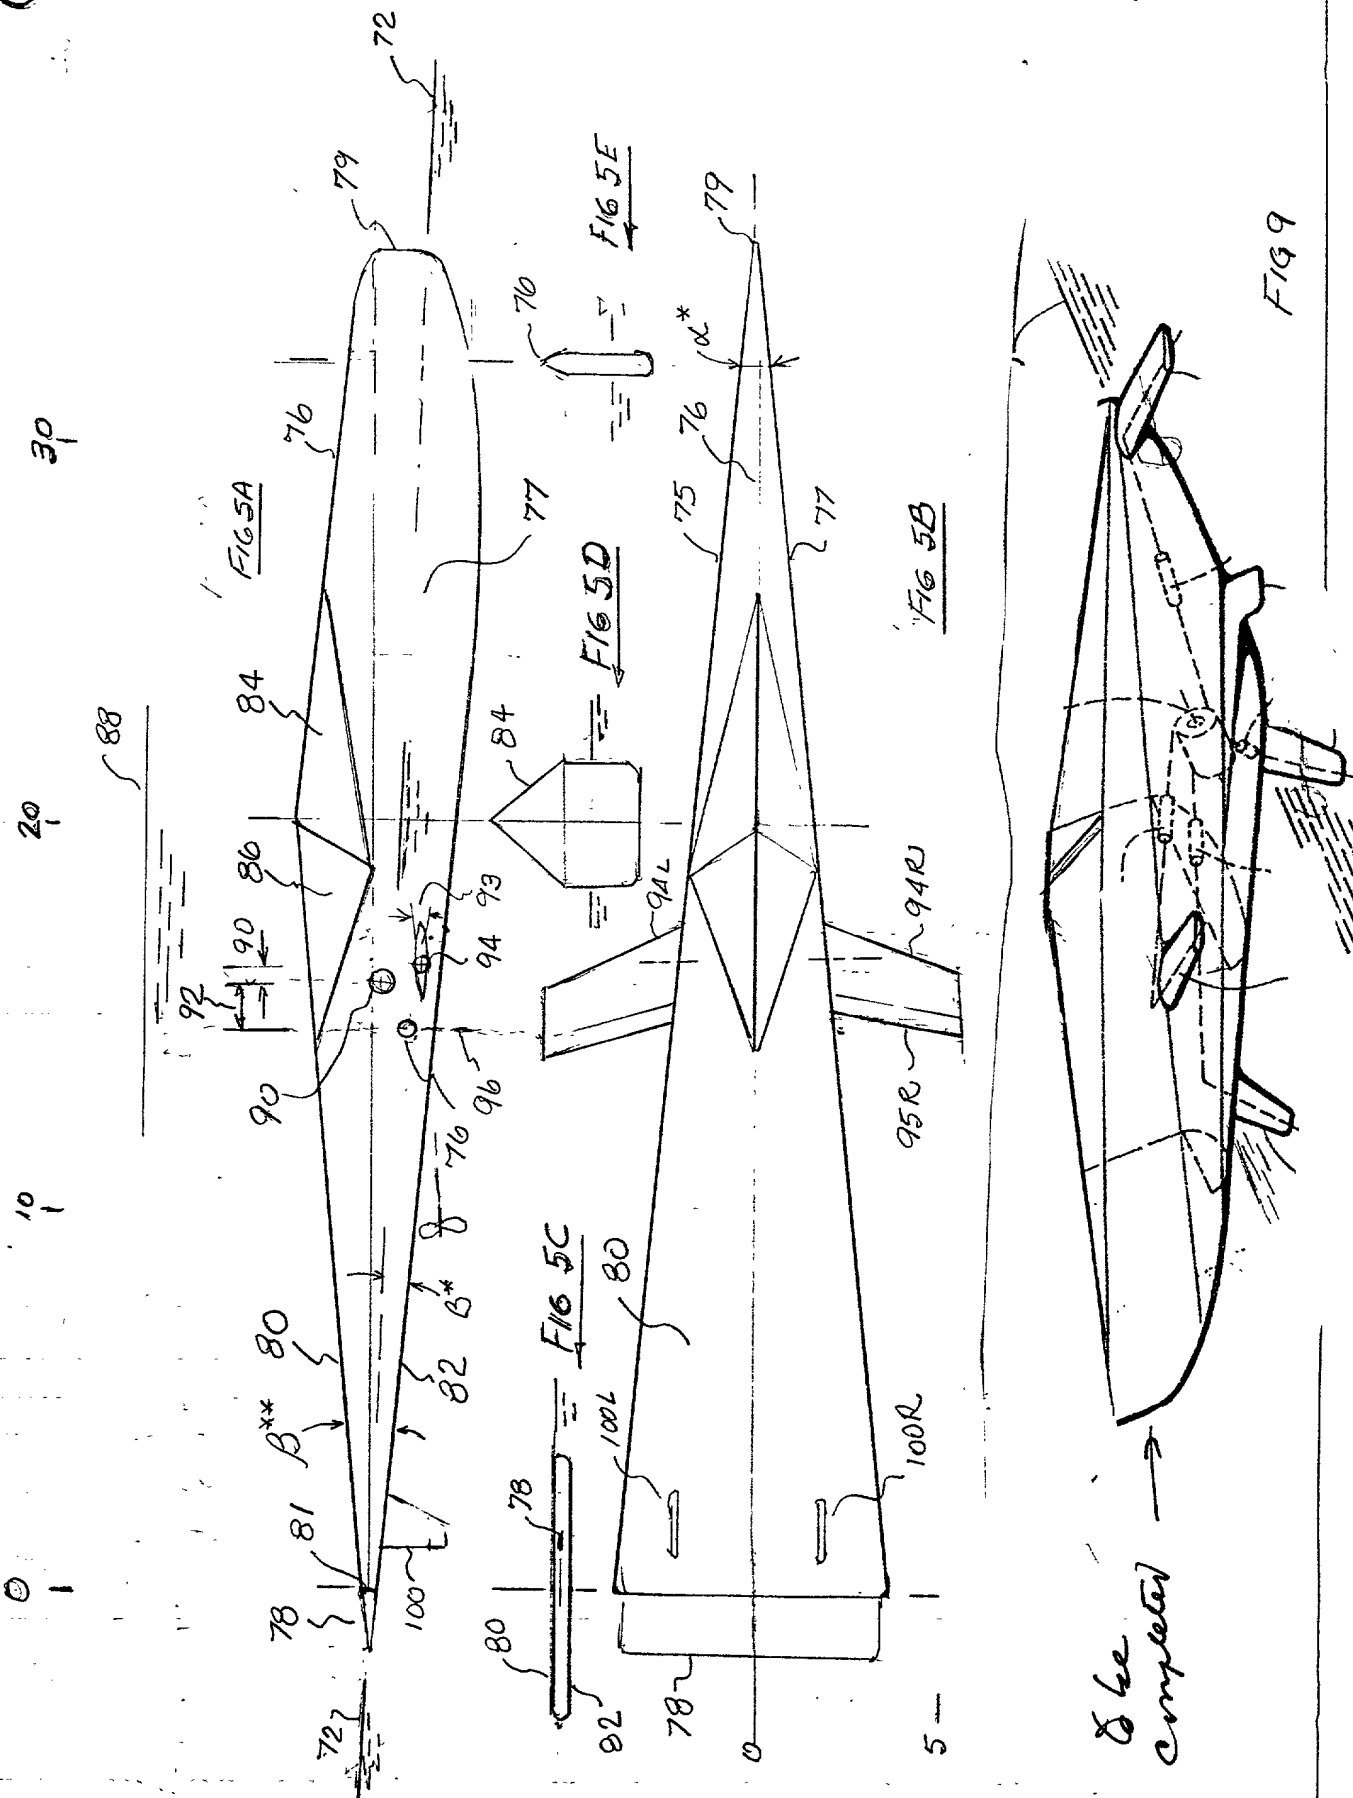


FIG 4A









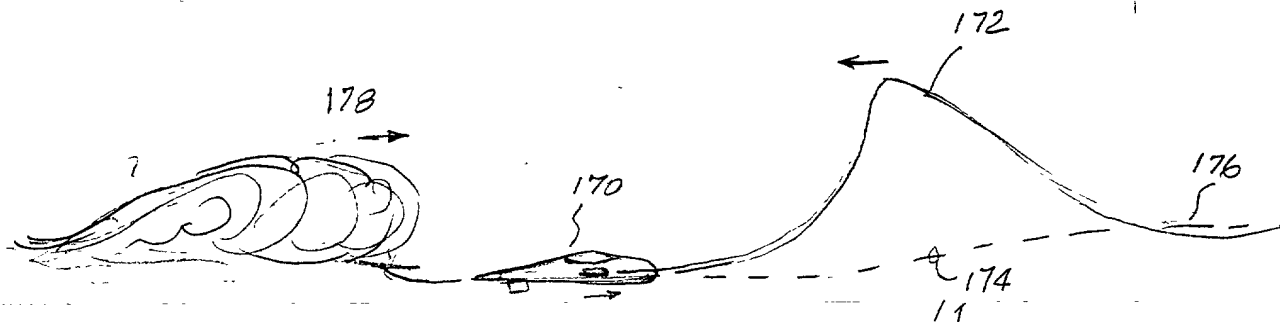


FIG 8B

FIG 8A

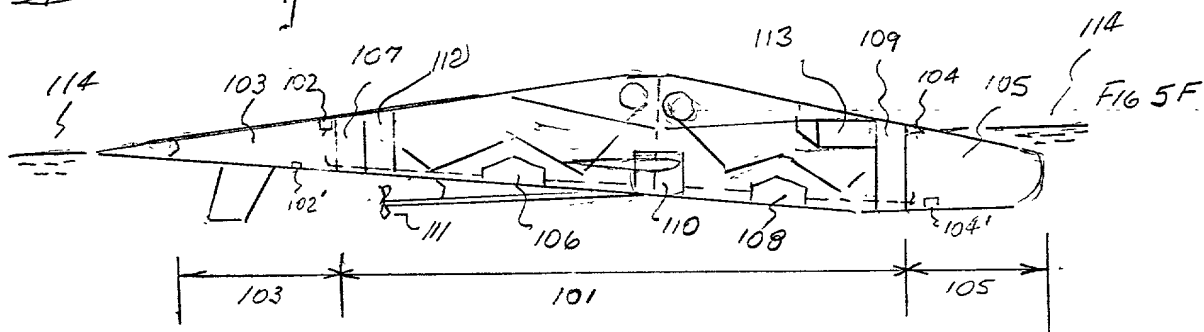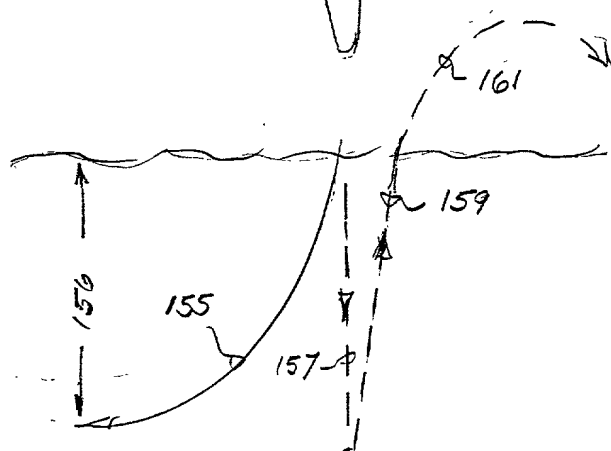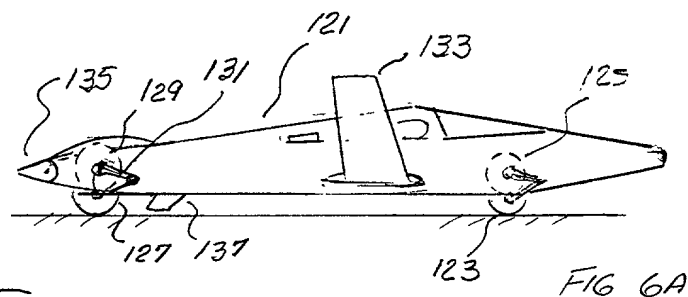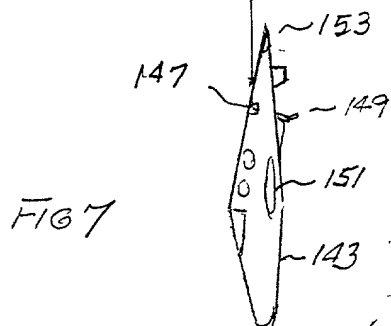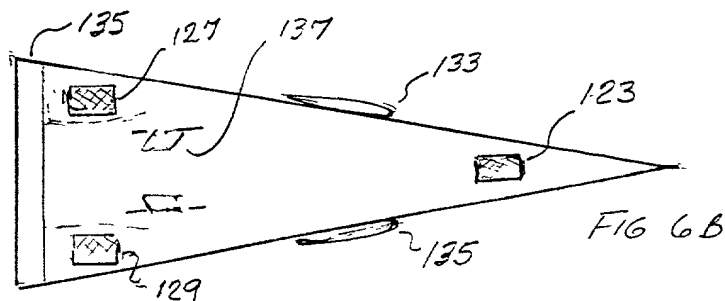

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

*Alvarez.  
Peru and a*

*resident of  
Alvarez*

Alberto Alvarez-Calderon F., the above named Petitioner, declares that he is a citizen of the United States and a resident of the State of California, with a residence and post office address of 410 Fern Glen, La Jolla, CA 92037, that he verily believes himself to be the original, first and sole inventor of the subject matter which is described and claimed in the annexed specification entitled MULTIMISSIION TRANSONIC HULL AND HYDROFIELD and for which a patent is sought;

that he does not know and does not believe that the same was ever known or used in the United States of America before his invention thereof or patented or made the subject of an inventor's certificate or described in any printed publication in any country before his invention thereof, or more than one year prior to the date of said application, or in public use or on sale in the United States more than one year prior to the date of said application;


that said invention has not been patented or made the subject of an inventor's certificate before the date of said application in any country foreign to the United States on an application filed by him or his legal representatives or assigns more than twelve months prior to the date of said application;

that said invention was the subject of a utility patent application Serial No. 08/814,417 filed on March 11, 1997 and that the instant application claims priority based on the cited utility patent application;

that he acknowledges a duty under 37 C.F.R. § 1.56 to disclose information he is aware of which is material to the examination of the application, that he has reviewed and understands the contents of the specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration, and that no application for patent on said invention has been filed by him or his representatives or assigns in any country foreign to the United States, except as follows: None.

And he hereby appoints the Law Offices of Adam H. Jacobs, comprising Adam H. Jacobs, Registration N° 37,852, 1904 Farnam Street, Suite 726, Omaha, Nebraska 68102, as his attorney to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

The undersigned Petitioner declares further that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

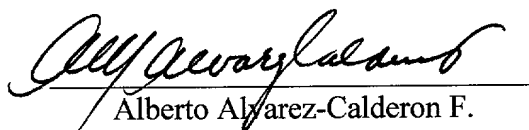  
Alberto Alvarez-Calderon F.

Date: Sept 25 2000

006350-00000000